

# B1294 Option 004

## Highlights

- Easy to install battery backup power supply
- Provides AC power failure alarm
- 1.4AH of standby protection
- Includes B1256 AC Adapter





## Specifications

Input Voltage:	15VDC (from 120VAC adapter)
Output Voltage:	13.3VDC (nominal) 11.0VDC (min) 15.8VDC (max)
Low-voltage Disconnect:	11.0VDC
Output Current:	400mA maximum
Battery Type:	PS-1212 Sealed lead-acid
Battery Capacity:	1.4AH
Battery Life:	27 hours (max) 15 hours (min) - B1290 only connected 3.5 hours - multiple devices connected max current draw (400mA)
Relay Type:	Form C
Relay Max. Voltage:	110VDC, 125VAC Max
Relay Max Power:	30W (1A @ 30VDC ) 37.5W (0.3A @ 125VAC)
Operating Temperature:	-40°C to +40°C
Charging Temperature:	-20°C to +40°C

## Dimensions

Length (L) cm (in)	Width (W) cm (in)	Height (H) cm (in)
13.72 (5.4)	8.97 (3.5)	7.84 (3.1)

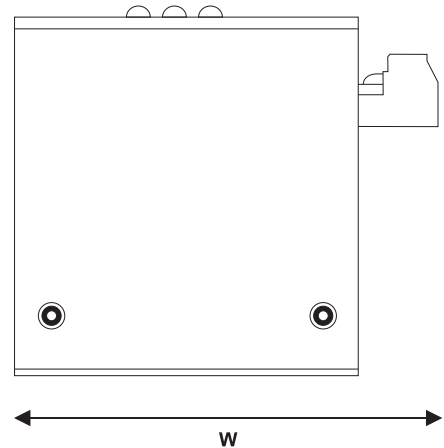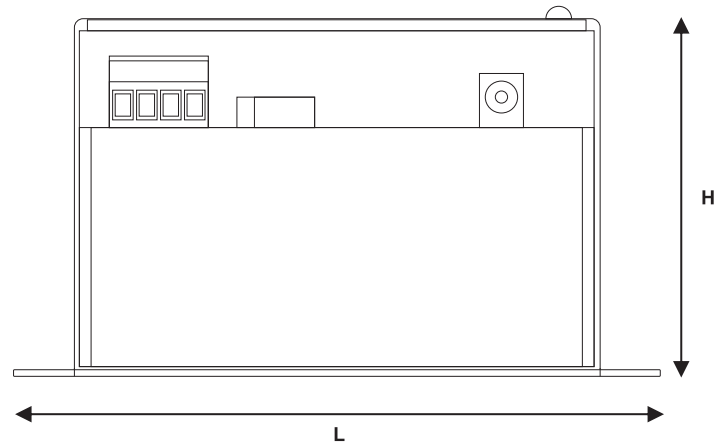

**BARNETT ENGINEERING LTD.**  
#200, 550 - 71 Avenue SE  
Calgary, Alberta, Canada T2H 0S6  
(L)403-255-9544 (T)800-268-2646

*Building quality products since 1977*

[sales@barnettprotalk.com](mailto:sales@barnettprotalk.com)

[www.barnettprotalk.com](http://www.barnettprotalk.com)